


W 系列 截止式电磁换向阀
Series poppet valves

K25J-W series poppet valve 5/2-way



图形符号 symbols

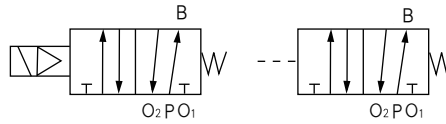

产品特点 Features

K25J-W系列是二位五通管接截止式换向阀。该阀结构合理，动作可靠，维修方便，尤其适用于较为恶劣的工作环境。分电控和气控两种。

K25J-W series is 5/2 way poppet valve for line Mounting. Streamlined structure, reliable action easy of maintenance, and especially suits to tough work conditions. Two types: solenoid pilot control or Air remote pressure control

型号注释 Order Code

K 25 J D - 15 W

- 空气介质 Air medium
- 二位五通 5/2 ways
- 截止式 poppet valve
- D: 单电控 D: Single solenoid pilot control
K: 单气控 K: air head for remote pressure control
- 公称通径 Dia
- W或WHT公司代号 W or WHT Company code

技术参数 Specification

型号 type	K25J-8WHT	K25J-10WHT	K25J-15WHT	K25J-20W	K25J-25W	K25J-32W	K25J-40W
流量 Flow rate(m³/h)	5	7	10	20	30	40	50
有效截面积S值 Effective sectional area(mm²)	20	35	60	120	190	300	400
泄漏量 Leakage rate(cm³/min)	≤50	≤100	≤200	≤300			
换向时间 Direction diverting time(sec)	≤0.04	≤0.06	≤0.10	≤0.15			
切换频率 Switch-over frequency Hz	≥10	≥8	≥4	≥3			
工作压力 Working pressure(MPa)	0.1-1						
电压 Voltage(V)	AC:380,220,110,36 DC:220,110,24						
工作温度 Working temp.(°C)	-5-50						

外形尺寸 Outlook & Dimension

型号 Type	公称通径 Dia	接管螺纹 Threads (英制)G	A	B	C	D	E	F	G	H	R	S	X	V	L	O
			K25J-8WHT	Ø8	G1/4											
K25J-10WHT	Ø10	G3/8	180	99	94	45	32	31	Ø10	55	44	19	16	28	90	G1/2
K25J-15WHT	Ø15	G1/2														
K25J-25WHT	Ø20	G3/4	219	112	130	52	39	43	Ø10	71	62	23	25	36	140	G1
	Ø25	G1														
K25J-32W	Ø32	G1¼	285	155	220	69	55	117	Ø10	140	80	36	35	52	187	G2
K25J-40W	Ø40	G1½														

